

Technical Data Sheet

Dynamism ABS is made with a specialty bulk-polymerized ABS resin, which has significantly lower volatile content compared to traditional ABS resins. It delivers excellent printing quality with minimal odor during printing.

PHYSICAL PROPERTIES

PROPERTY	TESTING METHOD	TYPICAL VALUE
Density	ISO1183, GB/T1033	1.12g/cm ³ at 23°C
Melt index	220°C, 2.16kg	9-14 g/10min
Light transmission	N/A	N/A
Flame retardancy	N/A	N/A

CHEMICAL RESISTANCE DATA

PROPERTY	TESTING METHOD
Effect of weak acids	Not resistant
Effect of strong acids	Not resistant
Effect of weak alkalis	Resistant
Effect of strong alkalis	Resistant
Effect of organic solvent	Not resistant
Effect of oils and grease	No data available

THERMAL PROPERTIES

PROPERTY	TESTING METHOD	TYPICAL VALUE
Glass transition temperature	DSC, 10°C/min	101.1 °C
Melting temperature	DSC, 10°C/min	N/A
Crystallization temperature	DSC, 10°C/min	113.5 °C
Decomposition temperature	TGA, 20°C/min	>380°C
Vicat softening temperature	ISO 306, GB/T 1633	103.9 °C
Heat deflection temperature	ISO 75 1.8MPa	98.2 °C
Heat deflection temperature	ISO 75 0.45MPa	99.6 °C
Thermal conductivity	N/A	N/A
Heat shrinkage rate	N/A	N/A

MECHANICAL PROPERTIES


PROPERTY	TESTING METHOD	TYPICAL VALUE
Young's modulus (X-Y)	ISO 527, GB/T 1040	2174 ± 285 MPa
Young's modulus (Z)		1835 ± 36 MPa
Tensile strength (X-Y)	ISO 527, GB/T 1040	33.3 ± 0.8 MPa
Tensile strength (Z)		25.4 ± 0.8 MPa
Elongation at break (X-Y)	ISO 527, GB/T 1040	2.7 ± 0.4 %
Elongation at break (Z)		2.4 ± 1.2 %
Bending modulus (X-Y)	ISO 178, GB/T 9341	2844 ± 411 MPa
Bending modulus (Z)		N/A
Bending strength (X-Y)	ISO 178, GB/T 9341	72.8 ± 0.7 MPa
Bending strength (Z)		N/A
Charpy impact strength (X-Y)	ISO 179, GB/T 1043	12.6 ± 1.1 kJ/m ²
Charpy impact strength (Z)		10.5 ± 0.4 kJ/m ²
Charpy impact strength (Z)	ISO 7619-1, GB/T 531.1	~72D

RECOMMENDED PRINTING CONDITIONS


PARAMETER	
Nozzle temperature	245 – 265 (°C)
Build surface material	BuildTak®
Build surface treatment	Glue, Magigoo
Build plate temperature	90 - 100 (°C)
Cooling fan	OFF
Printing speed	30-50 (mm/s)
Raft separation distance	0.2 (mm)
Retraction distance	1 (mm)
Retraction speed	20 (mm/s)
Environmental temperature	Room temperature - 90 (°C)
Threshold overhang angle	50 (°)
Recommended support material	PolyDissolve™ S2

Based on 0.4 mm nozzle and Simplify 3D v.4.0. Printing conditions may vary with different nozzle diameters


TENSILE TESTING SPECIMEN ISO 527, GB/T 1040

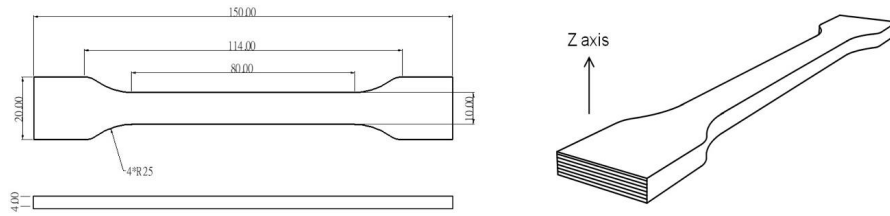

FLEXURAL TESTING SPECIMEN ISO 178, GB/T 9341

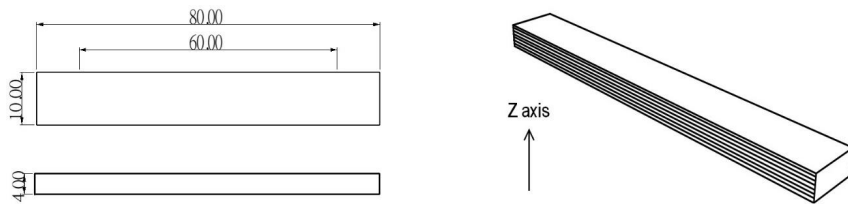

IMPACT TESTING SPECIMEN ISO 179, GB/T 1043

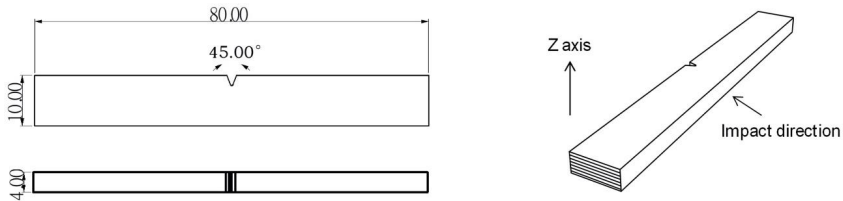

HOW TO MAKE SPECIMEN

*All specimens were conditioned at room temperature for 24h prior to testing

Printing temperature	255 °C
Bed temperature	100 °C
Shell	2
Top & bottom layer	4
Infill	100%
Environmental temperature	90 °C
Cooling fan	OFF

DISCLAIMER

The typical values presented in this data sheet are intended for reference and comparison purposes only. They should not be used for design specifications or quality control purposes. Actual values may vary significantly with printing conditions. End- use performance of printed parts depends not only on materials, but also on part design, environmental conditions, printing conditions, etc.

Product specifications are subject to change without notice.

Each user is responsible for determining the safety, lawfulness, technical suitability, and disposal/recycling practices of Dynamism materials for the intended application. Dynamism makes no warranty of any kind, unless announced separately, to the fitness for any use or application. Dynamism shall not be made liable for any damage, injury or loss induced from the use of Dynamism materials in any application.